


DN	NPS	A	L	D	K	d	B	N- ϕ	H	ϕW
350	14"	336	381	535	476.3	413	35.4	12-29	1145	450
400	16"	387	406	595	539.8	470	37	16-29	1333	500

Performance Specification			
Nominal Pressure		150LB	
Shell test		3.0	
Back seat test		2.2	
Seat test		2.2	
Gas test		0.6	
Working Temperature -20~425 °C			
Medium: W.O.G			

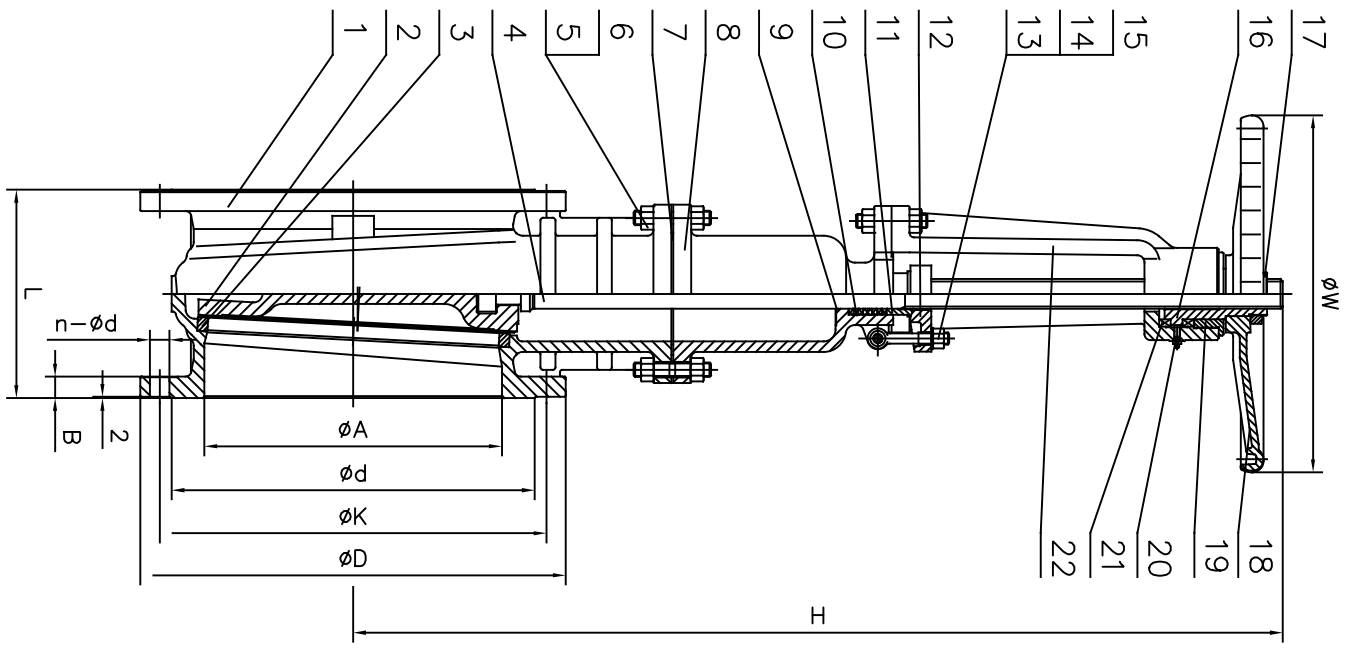

22	Yoke	A216 WCB
21	Bearing	Steel
20	Oil cup	SS304
19	Bearing gland	A29 1035
18	Handwheel	Ductile iron
17	Lock Nut	A29 1035
16	Stem nut	Ductile iron+Cu
15	Pin	A29 1025
14	Nuts	A194 2H
13	Eye bolt	A193 B7
12	Gland flange	A216 WCB
11	Gland	A276 410
10	Packing	Flexible graphite
9	Back seal	13Cr
8	Bonnet	A216 WCB
7	Gasket	SS304+Flexible graphite
6	Nuts	A194 2H
5	Bolts	A193 B7
4	Stem	A182 F6a
3	Seat	A105+13Cr
2	Disc	A216 WCB+13Cr
1	Body	A216 WCB
No.	Part name	Material